


NOTICE - SOURCE FLUID POWER CLAIMS PROPRIETARY RIGHTS ON THE INFORMATION DISCLOSED ON THIS DRAWING. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING HEREON WITHOUT DIRECT WRITTEN PERMISSION FROM SOURCE FLUID POWER TO THE USER.


REV	DATE	REVISION	BY
-----	------	----------	----

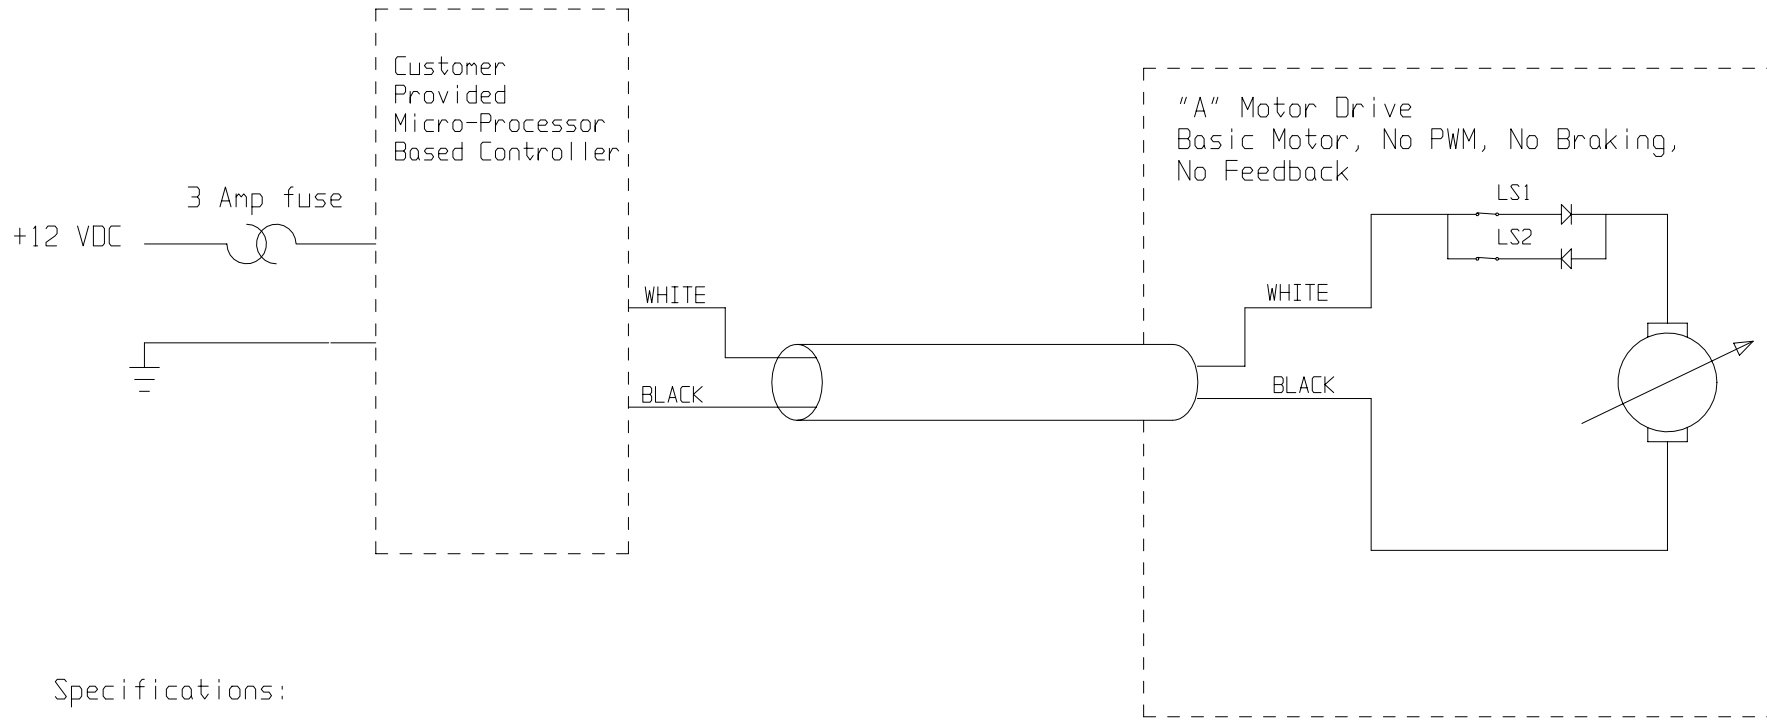

Specifications:

Supply power : 12VDC, 370 mA nominal, 2.75 A In rush

Operation: 12 VDC + (positive) on black wire and 12VDC -(negative) on white wire will drive valve open
 12 VDC + on white wire and 12 12VDC - on black wire will drive valve closed
 Power will internally diconnect at end of travel and respond only to reversed polarity.

	SOURCE FLUID POWER 331 Lake Hazeltine Drive Chaska, MN 55318 952-368-3866 (Fax) 952-448-3392	
	DRAWN BY GLM	DATE 7/7/06